



This leaflet gives only basic information on how to operate the M12 Mirror Taximeter. Its many other functions are detailed in a full manual available on the Aquila Electronics web site at:

www.aquila-electronics.co.uk


Alternatively, you can contact your local Aquila dealer for assistance.

Quick Start Guide

M12 MIRROR TAXIMETER

Aquila Electronics Limited
Stafford · England
Telephone: 01785 823635
www.aquila-electronics.co.uk

© Aquila Electronics Limited
N00521 Issue 1

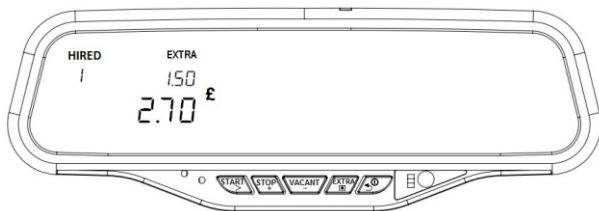

MODES

STANDBY/OFF

FOR HIRE/VACANT Available for hire. Roof lamp on ¹.

HIRED Charging time/distance

STOPPED Charging distance only (for Testing).

TURNING THE METER ON

ANY BUTTON To wake the meter. Meter shows "OFF"

to enter **FOR HIRE**

FUNCTIONS IN FOR HIRE MODE

HOLD to go to **STANDBY/OFF**

Time and date

Last fare and speed

Main totals and information menu *

STARTING THE JOURNEY

In **FOR HIRE** mode, press to enter **HIRED**

If your tariff has groups, press to select one.

... then to select your charging rate ².

FUNCTIONS IN HIRED MODE

To add extras, press ¹.

To change rate, press ².

ENDING THE JOURNEY

In **HIRED** mode, press to enter **STOPPED**.

To go back to **HIRED** mode, press ¹.

To add extras, press

To add the fare and extras together, press

RETURNING TO FOR HIRE

To return to **FOR HIRE**

* ENTERING THE MAIN TOTALS/INFO MENU

Press in **FOR HIRE** mode:



Enter menus



Leave menus

rEvEnUES	Totals
tARI INF	Installation info
tRF INFo	Tariff info
PrInTEr	Printer functions
MEASURe	Pulse test
VERSI on	Software version



Scroll through menus

REVENUES/TOTALS MENU

dAIl LY	Daily totals - cleared by selecting "rESEt".
totALS	Main totals



Scroll through totals

diSt-riL	Distance
hREd-riL	Paid distance
tRIPS	Trips
EXtRA FA	Extras
tot FARE	Total Fare + Extras
PrInT	Print Totals
rESEt	Reset Totals (Daily totals only)

2 x



¹ The availability of these features depends on the programming of your Taximeter

² The selection of rates depends on the tariff programmed into your Taximeter. Some rates may be selected